

Converting Door to Drawer

Step 1 - Remove the cylinder housing set screw and cylinder housing from the lock body. Set the lock assembly face down on a flat surface.

Step 2 - Remove the two screws and the back cover plate from the back of the lock body. Remove the bolt, cam disk, and prong driver from the lock body.

Step 3 - Reinsert the cylinder housing in drawer orientation and fix in place with set screw.

Step 4 - Place the lock face side down on a flat surface. Install the drawer (W) prong driver first, then place the cam disk over the top in the orientation indicated in *Fig. 2a*.




Fig. 2a - Installation of drawer prong driver and cam disk

Step 5 - Install the bolt so that the "CAB" side is facing you. The bolt throw should be beyond the bottom of the lock as indicated in *Fig. 3a*.

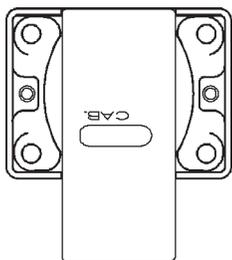


Fig. 3a - Back of drawer lock with bolt installed.

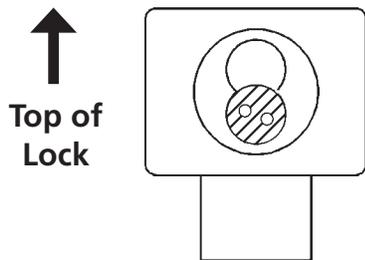


Fig. 4a - Front of drawer lock with prong driver in correct orientation

Step 6 - Reinstall back cover plate.

Step 7 - Insert the black plastic actuator and turn until the bolt is completely extended and the prongs are just past horizontal as in *Fig 4a*.

Converting Drawer to Door

Step 1 - Remove the cylinder housing set screw and cylinder housing from the lock body. Set the lock assembly face down on a flat surface.

Step 2 - Remove the two screws and the back cover plate from the back of the lock body. Remove the bolt, cam disk, and prong driver from the lock body.

Step 3 - Reinsert the cylinder housing in door orientation and fix in place with set screw.

Step 4 - Place the lock face side down on a flat surface. Install the door (R) prong driver first, then place the cam disk over the top in the orientation indicated in *Fig. 2b*.




Fig. 2b - Installation of door prong driver and cam disk

Step 5 - Install the bolt so that the "DRWR" side is facing you. The bolt throw should be beyond the bottom of the lock as indicated in *Fig. 3b*.




Fig. 3b - Back of door lock with bolt installed

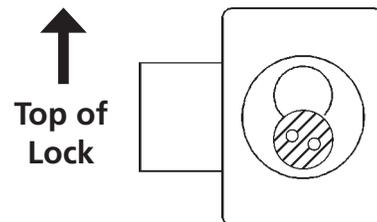


Fig. 4b - Front of door lock with prong driver in correct orientation

Step 6 - Reinstall back cover plate.

Step 7 - Insert the black plastic actuator and turn until the bolt is completely extended and the prongs are just past horizontal as in *Fig 4b*.