


Included Accessories (1-1/8 barrel length locks):



- 2 10-350 plastic spacers
- 1 10-054 1/4" plastic bar strike
- 1 10-055 1/2" plastic bar strike
- 4 lock mounting screws
- 1 10-360 universal driver
- 1 10-361 tailpiece (Schlage)

Included Accessories (1-3/8 barrel length locks):


- 1 10-054 1/4" plastic bar strike
- 4 lock mounting screws
- 1 10-360 universal driver
- 1 10-362 tailpiece (Schlage)
- 1 10-363 tailpiece (Medeco)
- 1 10-364 tailpiece (Assa)

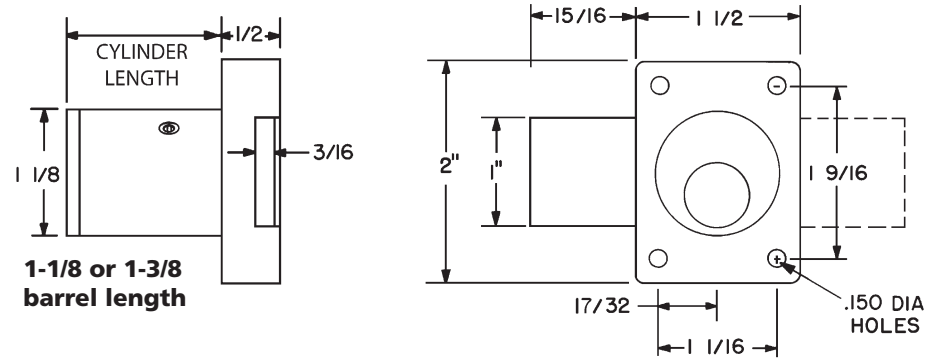

See pages 2 - 3 for cylinder installation instructions.




Typical Installation

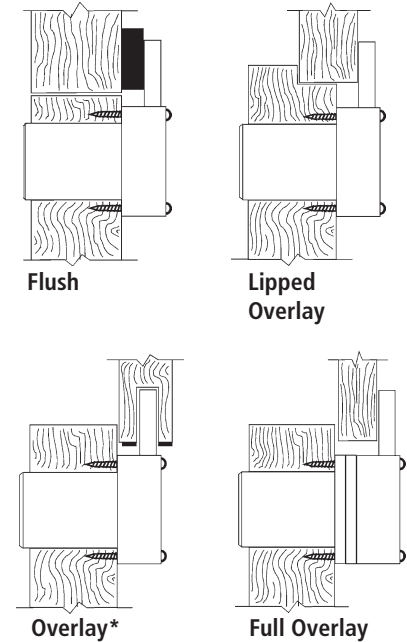


*Overlay installation is not recommended for particleboard.

Spacer options Note: use of spacers and strikes depends on application and material thickness.

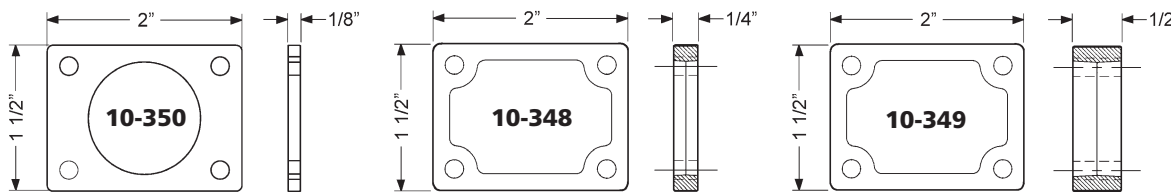

Installation/handling for key-retaining option

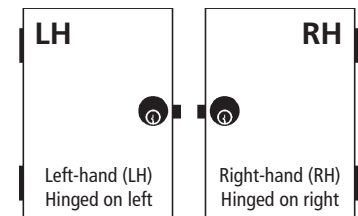

Cylinder installation for less cylinder locks with standard function *(key removable in locked and unlocked position)*


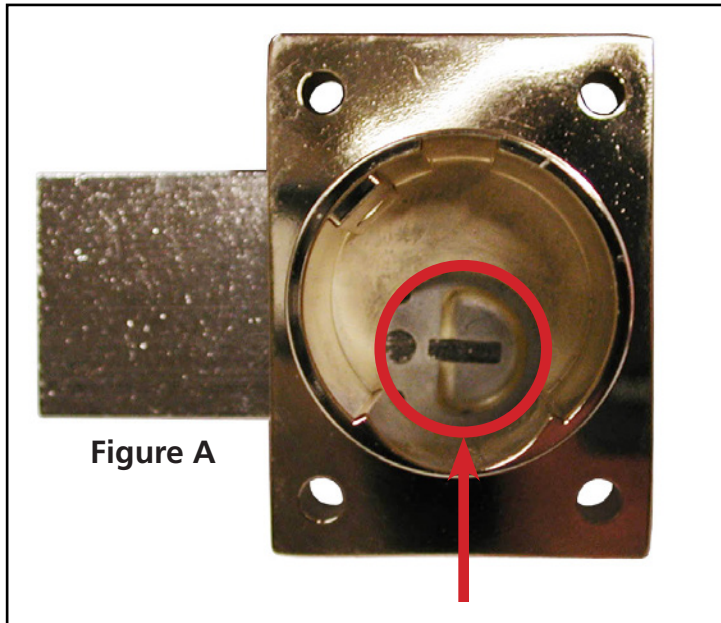


Figure A

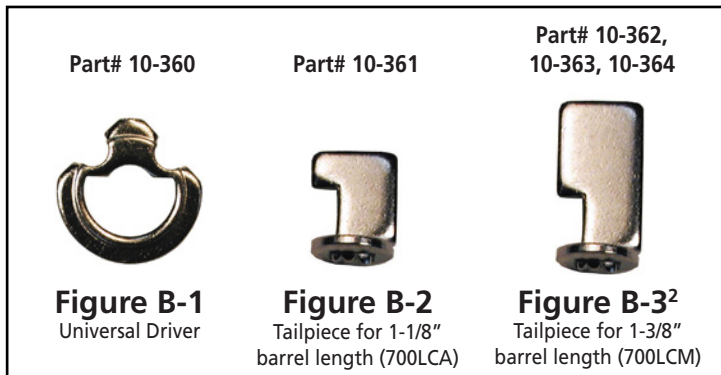

Part# 10-360

Part# 10-361

Part# 10-362,
10-363, 10-364



Figure B-1
Universal Driver



Figure B-2
Tailpiece for 1-1/8"
barrel length (700LCA)



Figure B-3²
Tailpiece for 1-3/8"
barrel length (700LCM)

² **NOTE: Figure B-3.** 700LCM (1-3/8" barrel length locks) ship standard with 3 tailpieces for use with the following cylinders:
10-362 - For use with Schlage original or Schlage compatible cylinders
10-363 - Stamped "M" - for use with Medeco cylinders
10-364 - Stamped "A" - for use with Assa cylinders

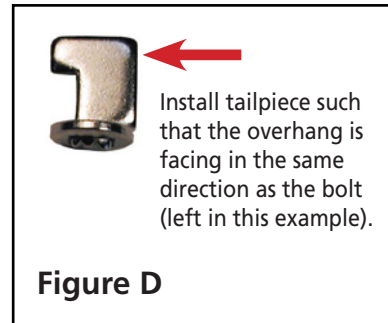


Figure D

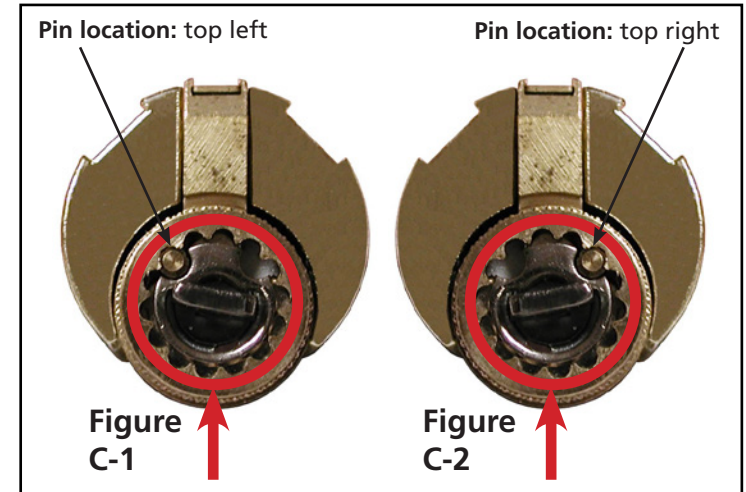


Figure C-1

Figure C-2

Cylinder installation for standard function¹

Step 1: Cycle lock so that the deadbolt is either completely left or completely right. The slot inside the lock case should be in a horizontal (left/right) orientation (Figure A).



Step 2: Install the universal driver (Figure B-1) into the back of the cylinder. If pin is located on the top left, install as shown in Figure C-1. If pin is located on top right, install as shown in Figure C-2.

Step 3: Install the tailpiece into the back of the cylinder in the horizontal position such that the overhang is facing in the same direction as the bolt when the cylinder is put into the lock housing (Figure D).

Step 4: Pick up the lock body and slide it down over the cylinder. If the tailpiece does not immediately go into the horizontal slot, pick up the complete assembly, put the key into the cylinder, and turn the key slightly back and forth until the tailpiece drops into the slot. Secure the cylinder housing to the body using the supplied set screw.

¹ *Standard (non-captive) function = key removable in the locked and unlocked position*

Cylinder installation for less cylinder locks with key-retaining function *(key removable in locked position only)*

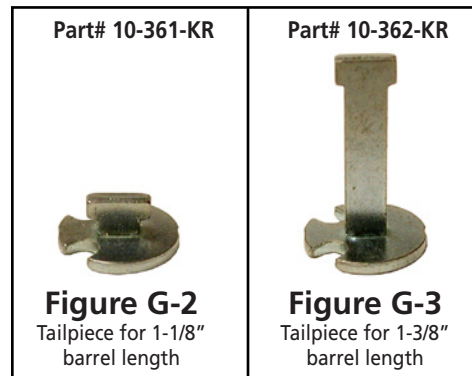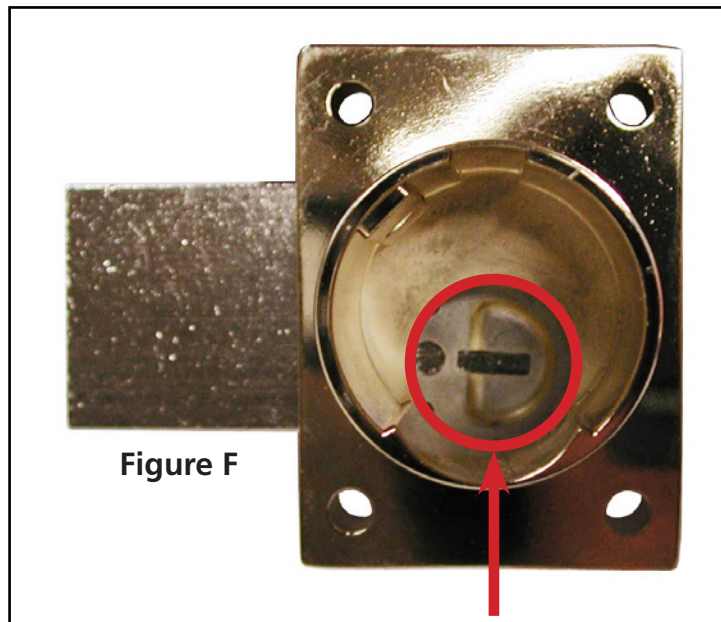

Special note: G-2 and G-3 drivers are based on use with standard Schlage compatible cylinders. If you are using a non-standard cylinder, you may need to modify the length of the G-2 or G-3 tailpiece to properly fit the cylinder into the lock body.

Cylinder installation for key-retaining function¹

Step 1: Cycle lock so that the deadbolt is in the desired "locked" position. The slot inside the lock case should be in a horizontal (left/right) orientation (Figure F).

Step 2: Install the key-retaining tailpiece into the back of the cylinder (for LCA 1-1/8" barrel length locks see Figure G-2 and for LCM 1-3/8" barrel length locks see Figure G-3).

If the pin is located on the top left, install as shown in Figure H-1. If pin is located on top right, install as shown in Figure H-2.

Step 3: Pick up the lock body and slide it down over the cylinder. If the tailpiece does not immediately slip into the horizontal slot, pick up the complete assembly, put the key into the cylinder, and turn the key slightly back and forth until the tailpiece drops into the slot. Secure the cylinder housing to the lock body using the supplied set screw.

¹ *Key-retaining (captive) function = key removable in the locked position only*

