


**Dimensions with  
optional long offset  
bolt installed.**

## Included Accessories:

2 nickel plated keys  
2 lock mounting screws




Alignment pin  
allows for sideways  
or upside-down  
mounting.

## Installation/handling




For inverted  
function, lock must  
be installed upside-  
down.

**Optional spacers** Note: use of spacers and strikes depends on application and material thickness.

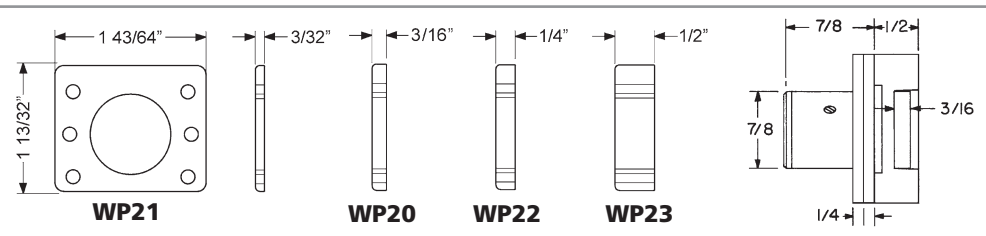

## Typical Installation

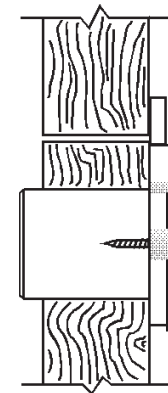

## Flush Mounted Lock

Note: Depending on your appli-  
cation of overlay, full overlay, or  
lipped overlay, you may need to use  
one of our optional strikes.